
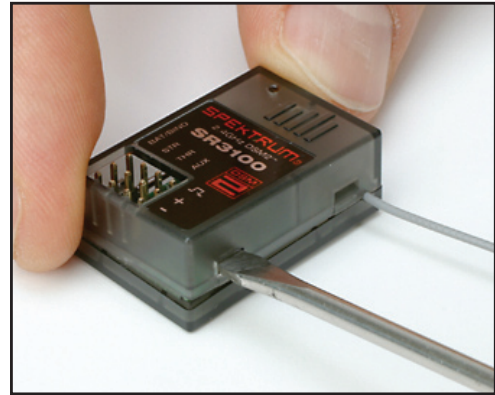


SR3100 Antenna Replacement Instructions

1. **Open the case.** Gently push a small flathead screwdriver into each of the two openings on the right side of the case as shown in the picture. Avoid inserting the screwdriver into the holes on the left side of the case as the receiver could be damaged.

2. **Remove the antenna.** Lift up on the antenna close to where it connects to the circuit board.

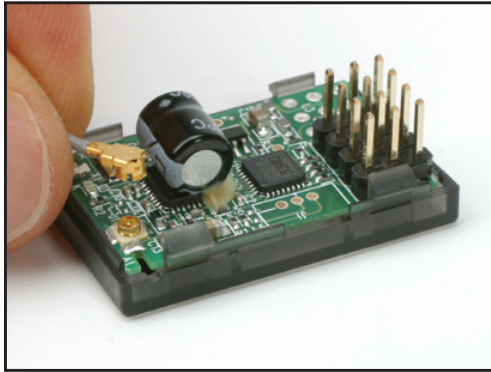


3. **Connect the new antenna.**

Align the antenna with the connector on the circuit board.

Apply a light pressure to the top of the antenna connector and it will pop into place. **DO NOT FORCE THE ANTENNA.**

4. **Swivel the antenna back and forth.** If connected correctly, the antenna will swivel freely. If it doesn't, the antenna is not connected correctly.

5. **Find the small round cutouts in the case.** Make sure that when you replace the case that the antenna fits into the round slots. **IF YOU DO NOT ALIGN THE SLOTS, THE ANTENNA WILL BE DAMAGED.**

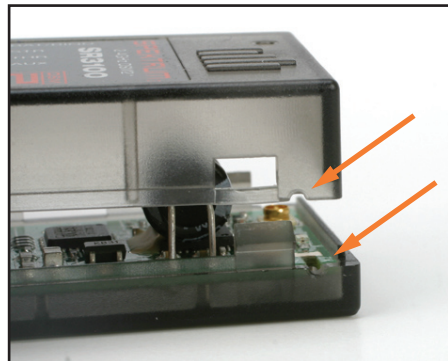

6. **Snap the case back together.**

It should easily snap back together. If it doesn't, check to make sure that you have everything aligned correctly.